



Contact us:

Head Office:

79/81, West View Building A,
Shop No. 1, Ground Floor,
10th Khetwadi Lane,
Mumbai 400 004, India

☎ +91-22-2380 2185

☎ +91-22-2380 2421

✉ dineshmetalindustries@gmail.com

Branch office:

34, Fruitwala Lane,
Near Jain Raksha Bandhan,
Bapunagar, Ahmedabad 380 024, India

☎ +91-79-2274 3905

☎ +91-79-2273 0820

✉ dmiahd@gmail.com



DINESH METAL INDUSTRIES

IMPORTERS, STOCKISTS & AUTHORIZED DEALERS OF: CARBON STEEL
SEAMLESS PIPES & TUBES, FERROUS & NON FERROUS METALS



ABOUT US

Dinesh Metal Industries is a reliable partner and specialist of **seamless steel tubes and pipes** since 1995. With 5,000 tons of continually available stock we are one of the most significant steel tube suppliers in Indian Market.

We deliver complete packages either from our central Warehouse in kalamboli or from strategically selected warehouse from **Taloja, Mumbai or Ahmedabad**. This, combined with our comprehensive service, is sure to satisfy our customers requirements fully and individually every time.

Our long-term partnership with major customers is based on their recognition of our dedication, reliability and the consistent high quality of our products and service.

We are Authorized Dealer for Indian Seamless Metal Tubes Limited and Jindal Saw Limited



AMBITION




VISION



POLICY



MISSION

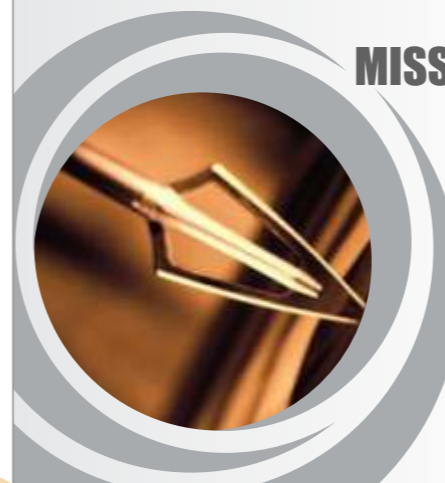

OUR TARGET

Maximum Customer Satisfaction

Ambition:

Our aspiration is continual reliability and fairness in co operation with all market partners. All employees feel obliged to fulfill this target. That's why commitment and responsibility play a significant role at **Dinesh Metal Industries**.

Policy:

To supply products of highest possible standards of Quality and Services in accordance to the agreed terms and conditions of customer orders, thus meeting customer satisfaction as well as continually improve our Quality Management System through effective team work of our employees.

Vision:

Dinesh Metal Industries vision is to be the world's steel industry benchmark in "Value Creation" through the excellence of its people, its innovative approach and overall conduct. Underpinning this vision is a performance culture committed to aspiration targets, safety and social responsibility, continuous improvement, openness and transparency.

Mission:

We are committed to provide the highest standards of products and services to our clients. Quality, Integrity and Value are the keystones of our business.

OUR PRODUCTS

Carbon Steel:

ASTM (A53,A106), SA(179,192,210,213), DIN(2391, 17175), BS(3059), NACE(MR0175 and MR103), EN specification, HIC testing , H2 Service and SSC tested material for sour application etc.

Line Pipes:

API 5L(B,X42,X52,X56,X60,X65-PSL-I&PSL2)

Alloy Steel:

ASTM A335(P11,P22,T11,T22,P5,P9,P91,T91)

Low Temperature Pipes:

ASTM A333 Gr. 3 & 6

Major Steel Grade:

SAE (1019, 1518,1035,1010,1541,4130,4140,8620), DIN 17175(ST 35.8,ST 45.8, ST 52, 16Mo3, 13CrMo44,10CrMo44,10CrMo910) & other steel grade as per customer requirement.

Dimensions:

Outer diameter : 21.3mm to 609.6mm (i.e. ½"NB to 24"NB)

Wall thickness: 2.77mm to 40 mm

Available for delivery in random lengths of 5 meters to 12 meters or in a cut length according to customers requirements



OUR SERVICES

Cut Lengths:

With our modern high performance saws we can fulfill the customers requirements. Larger quantities can be cut to size within short notice.

Logistics:

Dinesh Metal Industries quality definition encompasses the complete service spectrum of the company. We only deliver high quality products and guarantee deliveries in time.

24hr service:

With our in-house crane, **Dinesh Metal Industries** guarantees a smooth delivery process. With our 24-hr service we prove our reliability and punctuality around the clock. This way we can deliver to our customers all across the world just in time.

Shipping via Truck / Rail / Ship:

The delivery with different means of transport allows a high level of flexibility possible and ensures that customers with different delivery connections can be supplied



HOW WE WORK

Your Enquiry: Our sales team are all experts in their field. On receiving your enquiry we will allocate the most suitable representative who will then discuss your requirements with you and prepare a quote. For standard tubes we aim to give you feedback within 24 hours of receiving your enquiry. If the specifications and quality requirements are more complex it may take slightly longer, but we will keep you posted on its progress.

Analyzing the order: After receiving your order our customer service team will process all relevant details, leasing with our technical, quality and planning departments.

Order Confirmation: You will then receive your order confirmation with a final delivery date.

Acknowledgement: The response times for order acknowledgement can vary depending on the complexity of your requirements on quality and inspection test plans.

After sales service: Our customer service team can also handle your Kanban requirements, stock management as well as long term contracts.



OUR EXPERTISE & CORE VALUES

Boilers, Heat Exchangers & Condenser Applications

Mechanical Tubing & Structural Application

Petroleum and Petrochemicals

Refineries

Fertilizers

Dairy and Sugar

Oil Drilling

Automobile Applications

General Engineering

Fluid Conveyance Applications



WAREHOUSES



KALAMBOLI

Outer Diameter: 1/2 inches - 10 inches

Wall Thickness : upto 28 mm

Length Upto : upto 7 mtr

Square feet : 9,000 sqft

Stock Capacity : 3,000 tons

Facilities : Crane, Saw Cutting, Bundling

1501/02, Road no.17, Kalamboli Warehousing Complex,
Navi Mumbai - 410 218, India

TALOJA

Outer Diameter : 1/2 inches - 24 inches

Wall Thickness : upto 40 mm

Length Upto : upto 14 mtr

Square feet : 40,000 sqft

Stock Capacity : 15,000 tons

Facilities : Crane, Hydra, Saw Cutting,
Bundling

103/40, Ambernath Road, Near Nippon Paint,
Ghot Chal, Post Ghot Camp, Panvel - 410 208, India.



CHEMICAL ANALYSIS

CHEMICAL ANALYSIS											MECHANICAL PROPERTIES					
Specification	C%	Min %	P % Max	S % Max	Si %	Cr %	Cu % Max	Mo %	Ni % Max	Va % Max	Tensile Strength	Yield Stress	Elongation in	Hardness		
											Mpa	MPa	50 mm MIN Transverse			
1	ASTM A53/A	0.25 MAX	0.95 MAX	0.050	0.060	-	-	-	-	-	331 MIN	-	207 MIN	36	-	
2	ASTMA53/B	0.30MAX	1.20MAX	0.050	0.060	-	-	-	-	-	413 MIN	-	240 MIN	29.5	-	
3	ASTM A106/A	0.25 MAX	0.27-0.93	0.025	0.025	0.10 MIN	0.40 MAX	0.40	0.15 MAX	0.40	0.08	330 MIN	-	205 MIN	25/20	-
4	ASTM A106/B	0.30 MAX	0.29-1.06	0.025	0.025	0.10 MIN	0.40 MAX	0.40	0.15 MAX	0.40	0.08	415 MIN	-	240 MIN	16.5/12.0	-
5	ASTM A106/C	0.35 MAX	0.29-1.06	0.025	0.025	0.10 MIN	0.40 MAX	0.40	0.15 MAX	0.40	0.08	485 MIN	-	275 MIN	16.5/12.0	-
6	ASTM A179	0.06-0.18	0.27-0.63	0.048	0.048	-	-	-	-	-	-	325 MIN	-	180 MIN	35.0	72 HRB MAX
7	ASTM A192	0.06-0.18	0.27-0.63	0.048	0.058	0.25 MAX	-	-	-	-	-	325 MIX	-	180 MIN	35.0	77 HRB MAX
8	ASTM A209/T1	0.10-0.20	0.30-0.80	0.045	0.045	0.10-0.50	-	-	0.44-0.65	-	-	380 MIN	-	205 MIN	30/22	80 HRB MAX
9	ASTM A209/T1A	0.15-0.25	0.30-0.80	0.045	0.045	0.10-0.50	-	-	0.44-0.65	-	-	365 MIN	-	195 MIN	30/22	81 HRB MAX
10	ASTM A209/T1B	0.14 MAX	0.30-0.80	0.045	0.045	0.10-0.50	-	-	0.44-0.65	-	-	415 MIN	-	220 MIN	30/22	77 HRB MAX
11	ASTM A210/A-1	0.27 MAX	5	0.048	0.058	0.10 MIN	-	-	-	-	-	415 MIN	-	255 MIN	30/22	79 HRB MAX
12	ASTM A210/C	0.35 MAX	0.29-1.06	0.048	0.058	0.10 MIN	-	-	-	-	-	485 MIN	-	275 MIN	30/22	89 HRB MAX
13	ASTM A213/T2	0.10-0.20	0.30-0.61	0.045	0.045	0.10-0.30	0.50-0.81	-	0.44-0.65	-	-	415 MIN	-	205 MIN	30/22	85 HRB MAX
14	ASTM A213/T5	0.15 MAX	0.30-0.60	0.030	0.030	0.50 MAX	4.00-6.00	-	0.45-0.65	-	-	415 MIN	-	205 MIN	30/22	85 HRB MAX
15	ASTM A213/11	0.15 MAX	0.30-0.60	0.030	0.030	0.50-1.00	1.00-1.50	-	0.45-0.65	-	-	415 MIN	-	205 MIN	30/22	85 HRB MAX
16	ASTM A213/T12	0.15 MAX	0.30-0.61	0.045	0.045	0.50 MAX	0.80-1.25	-	0.45-0.65	-	-	415 MIN	-	205 MIN	30/22	85 HRB MAX
17	ASTM A213/T-22	0.15 MAX	0.30-0.60	0.030	0.030	0.50 MAX	1.90-2.60	-	0.87-1.13	-	-	415 MIN	-	205 MIN	30/22	85 HRB MAX
18	ASTM A333/1	0.30MAX	0.40-1.06	0.025	0.060	-	-	-	-	-	-	380 MIN	J14	205 MIN	25/20	-
19	ASTM A333/6	0.30MAX	0.29-1.06	0.025	0.060	0.10 MIN	-	-	-	-	-	415 MIN	J14	240 MIN	16.5/12.0	-
20	ASTM A334/1	0.30MAX	0.40-1.06	0.025	0.025	-	-	-	-	-	-	380 MIN	J14	205 MIN	35/28	85 HRB MAX
21	ASTM A334/6	0.30MAX	0.29-1.06	0.025	0.025	0.10 MIN	-	-	-	-	-	415 MIN	J14	240 MIN	30/22	90 HRB MAX
22	ASTM A355/P1	0.10-0.20	0.30-0.80	0.025	0.025	0.10-0.50	-	-	0.44-0.65	-	-	380 MIN	-	205 MIN	20	-
23	ASTM A355/P2	0.10-0.20	0.30-0.61	0.025	0.025	0.10-0.30	0.50-0.81	-	0.44-0.65	-	-	380 MIN	-	205 MIN	20	-
24	ASTM A355/P5	0.15 MAX	0.30-0.60	0.025	0.025	0.50 MAX	4.00-6.00	-	0.45-0.65	-	-	415 MIN	-	205 MIN	20	-
25	ASTM A355/P11	0.15 MAX	0.30-0.60	0.025	0.025	0.50-1.00	1.00-1.50	-	0.44-0.65	-	-	415 MIN	-	205 MIN	20	-
26	ASTM A355/P12	0.15 MAX	0.30-0.61	0.025	0.025	0.50 MAX	0.80-1.25	-	0.44-0.65	-	-	415 MIN	-	205 MIN	20	-
27	ASTM A355/P22	0.15 MAX	0.30-0.61	0.025	0.025	0.50 MAX	1.90-2.60	-	0.87-1.13	-	-	415 MIN	-	205 MIN	20	-
28	BS/3059/1/33	0.15 MAX	0.30-0.70	0.050	0.050	-	-	-	-	-	-	324-441	-	186 MIN	25	-
29	BS/3059/2/33	0.15 MAX	0.40-0.70	0.050	0.050	0.10-0.35	-	-	-	-	-	324-441	-	186 MIN	21	-
30	BS/3059/2/45	0.12-0.18	0.90-1.20	0.040	0.035	0.10-0.35	-	-	-	-	-	441-560	-	245 MIN	22	-
31	BS/3059/1/620	0.10-0.15	0.40-0.70	0.040	0.040	0.10-0.35	0.70-0.10	-	0.45-0.65	-	-	441-618	-	235 MIN	22	-
32	DIN/17175/ST 35.8	0.17 MAX	0.40 MIN	0.040	0.040	0.35 MAX	-	-	-	-	-	340-441	-	235 MIN	25	-
33	DIN/ 17175/ST 45.8	0.22 MAX	0.45 MIN	0.040	0.040	0.10-0.35	-	-	-	-	-	441-540	-	255 MIN	25	-
34	DIN/17175/15MO3	0.12-0.20	0.50-0.80	0.040	0.040	0.15-0.35	-	-	0.25-0.35	-	-	441-540	-	284 MIN	21	-
35	DIN/17175/13CRM044	0.10-0.18	0.40-0.70	0.040	0.040	0.15-0.35	0.70-1.00	-	0.40-0.50	-	-	441-570	-	294 MIN	22	-
36	SAE52100	0.98-1.10	0.20-0.45	0.025	0.025	0.10-0.35	1.30-1.60	-	0.10 MIN	-	-	-	-	-	-	-

DIMENSIONS & WEIGHT

Nominal Pipe Size (mm/inch)	OD (mm)	Wall Thickness														
		Kgs. / Meter														
		Sch. 20	Sch. 30	STD	Sch. 40	XS	Sch. 60	Sch. 80	Sch. 100	Sch. 120	Sch. 140	Sch. 160	XXS			
15	1/2"	21.30	-	-	W.thick-weight- 1.27	2.77	2.77	3.73	-	3.73	-	-	-	-	4.78	7.47
20	3/4"	26.70	-	-	-	2.87	2.87	3.91	-	3.91	-	-	-	-	5.56	7.82
25	1"	33.40	-	-	-	2.87	2.87	3.91	-	3.91	-	-	-	-	2.90	3.64
32	1 1/4"	42.20	-	-	-	3.38	3.38	4.55	-	4.55	-	-	-	-	6.35	9.09
40	1 1/2"	48.30	-	-	-	2.50	2.50	3.24	-	3.24	-	-	-	-	4.24	5.45
50	2"	60.30	-	-	-	3.56	3.56	4.85	-	4.85	-	-	-	-	6.35	9.70
65	2 1/2"	73.00	-	-	-	3.39	3.39	4.47	-	4.47	-	-	-	-	5.62	7.78
80	3"	88.90	-	-	-	3.68	3.68	5.08	-	5.08	-	-	-	-	7.14	10.15
90	3 1/2"	101.60	-	-	-	4.05	4.05	5.42	-	5.42	-	-	-	-	7.25	9.55
100	4"	114.30	-	-	-	3.91	3.91	5.54	-	5.54	-	-	-	-	8.74	11.07
125	5"	141.30	-	-	-	5.44	5.44	7.48	-	7.48	-	-	-	-	11.12	13.44
150	6"	168.30	-	-	-	5.16	5.16	7.01	-	7.01	-	-	-	-	9.53	14.02
200	8"	219.10	6.35	7.04	8.18	8.18	11.41	15.28	-	15.28	-	-	-	-	14.92	20.4
250	10"	273.00	33.33	36.83	42.56	42.56	64.67	103.98	-	103.98	-	-	-	-	21.35	27.69
300	12"	323.80	6.35	7.80	9.27	9.27	12.70	18.64	-	18.64	-	-	-	-	11.13	15.24
350	14"	355.60	41.76	51.01	60.31	60.31	81.55	123.30	-	123.30	-	-	-	-	11.13	15.24
400	16"	406.40	7.92	9.53	11.13	11.13	14.27	20.62	-	20.62	-	-	-	-	18.26	21.95
450	18"	457.20	67.91	81.33	93.27	93.27	123.30	160.12	-	160.12	-	-	-	-	14.27	18.26
500	20"	508.00	7.92	11.13	14.27	14.27	19.05	26.19	-	26.19	-	-	-	-	18.26	21.95
550	22"	558.80	87.75	122.43	105.21	105.21	155.80	205.83	-	205.83	-	-	-	-	14.27	18.26
600	24"	609.60	9.53	12.70	15.09	15.09	20.62	26.19	-	26.19	-	-	-	-	18.26	21.95
			117.15	155.12	117.15	183.42	155.12	247.83	-	247.83	-	-	-	-	14.27	18.26
			9.53	12.70	9.53	-	12.70	22.23	-	22.23	-	-	-	-	14.27	18.26
			129.08	171.03	129.08	-	171.03	293.76	-	293.76	-	-	-	-	14.27	18.26
			9.53	14.27	9.53	17.48	12.70	24.61	-	24.61	-	-	-	-	14.27	18.26
			141.12	209.64	141.12	255.24	187.06	355.26	-	355.26	-	-	-	-	14.27	18.26